


- Drawing Notes:**
- All dimensions are shown in metres unless noted otherwise.
 - Do not scale from this drawing.
 - Refer to drawing 001.1 for site layout details.
 - Levels shown are metres above ordnance datum (AOD).
 - Aggregate and finish volumes do not include the additional 11,753,234m³ required. Assume this volume is made up with type 1 aggregate.

- Legend**
- Major Contour (5m)
 - Minor Contour (1m)
 - Site Grading (Fill)
 - Site Grading (Cut)

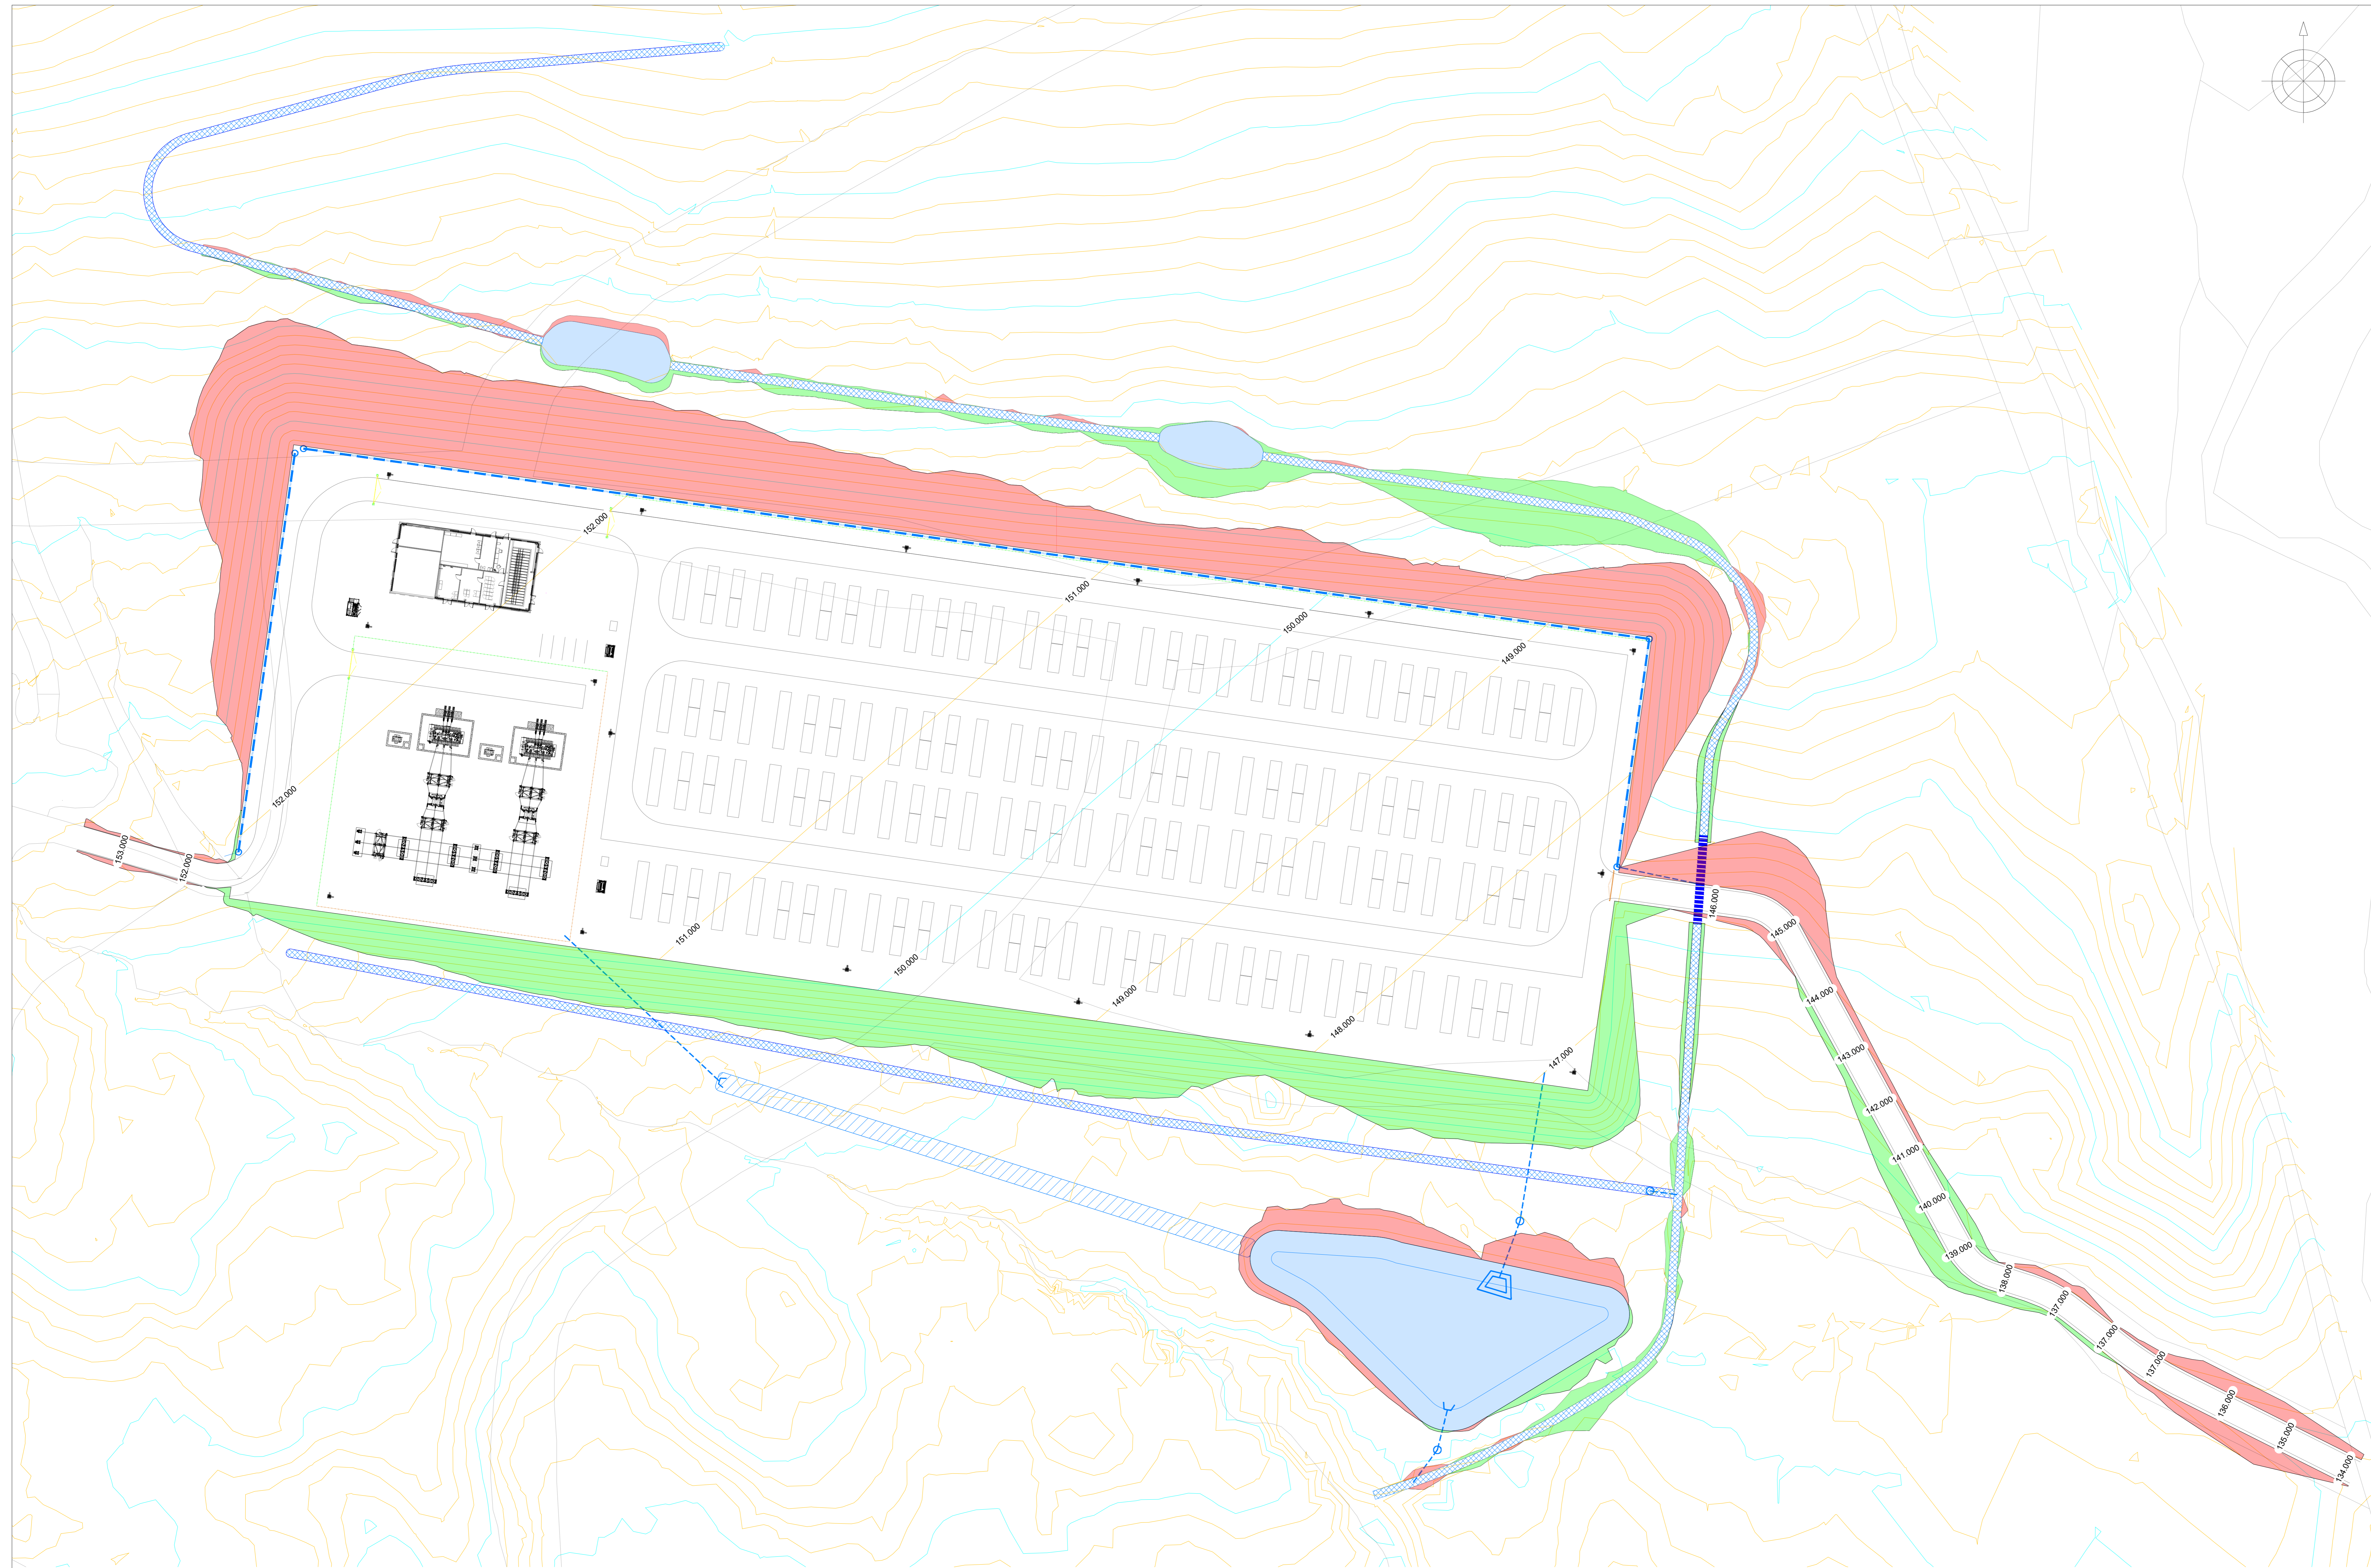

1:10 @ 100mm	200mm	300mm	400mm	500mm	600mm	700mm	800mm	900mm	1m
1:20	0.5m	1m	1.5m	2m	2.5m	3m	4m	5m	6m
1:50	1m	2m	3m	4m	5m	6m	7m	8m	10m
1:100	1m	2m	3m	4m	5m	6m	7m	8m	10m
1:200	5m	10m	15m	20m	25m	30m	40m	50m	60m
1:500	10m	20m	30m	40m	50m	60m	80m	100m	120m
1:1000 @ 10m	20m	30m	40m	50m	60m	70m	80m	100m	120m

1 Site Finish Levels Plan
Scale: 1:500 @ A0

Volume Summary		
Description	Unit	Area/Volume
Topsoil Removal (Assumed 300mm)	m ³	12,994.464
Cut Volume	m ³	49,241.547
Fill Volume	m ³	63,324.838
Additional Cut for Attenuation Basin	m ³	2,330.057
Net (Fill)	m ³	11,753.234
Import Fill Required	N/A	Yes
Topsoil Reused (Grading Area)	m ³	2,852.545
Topsoil Remaining	m ³	9,385.749
Site Aggregate Volume (Assumed 225mm CGA)	m ³	5,651.642
Site Finish Volume (Assumed 75mm Chippings)	m ³	1,883.881
Access Road Sub Base Volume (Assumed 350mm 6F5)	m ³	2,158.597
Access Road Finish Volume (Assumed 150mm Type 1)	m ³	925.113

REV	DATE	DESCRIPTION	BY	CHKD
3	10.10.2024	Ending ground levels added to plan.	JH	AP
2	10.09.2024	Site layout and walls amended.	JH	AP
1	02.08.2024	DC container and MW shafts for possible expansion removed from plan.	JH	AP
0	06.08.2024	Site Finish Levels Plan	JH	AP

FIELD

Field
Fors Montacute Yards
186 Shoreditch High Street
London
E1 6HU

PROJECT: Corriemollie

TITLE: Site Finish Levels Plan

DISCIPLINE: DESIGN

DRAWING STATUS: FOR INFORMATION

SCALE	DATE	DRAWN BY	CHECKED BY	APPROVED BY
1:500 @ A0	05.08.2024	JH	AP	RS
PROJECT NO.	DRAWING NO.	REV.		
BTGBCOR01	005.2	03		